

ML-700 (Max load 700)



MEASURES	PACKED	NO PACKED	CHARACTERISTICS	
High:	2155 mm	2015 mm	Minimal order:	20 pcs.
Length:	765 mm	735 mm	Units per palet:	1 pc.
Depth:	763 mm	732 mm	Unitary weight:	158 Kg.
			Packed weight:	168 Kg. (1 pc)
			Voltage:	230 V
INTERIOR CAPACITY:	354L		Frequency:	50 Hz
BOTTLES CAPACITY 50cl.:	246 pcs		Energy consumption:	4,1 kwh/24h
CAN CAPACITY 50cl.:	246 pcs		Plug:	Type - F (EU)

LOGISTICS DATA


CONTAINER 40 feet : 45pcs.
TRUCK 13,6mts. : 51pcs.

SERIGRAPHY MEASURES

LATERAL. 1981x670mm
CANOPY: 79x634mm

PACKING: Pallet, carton corner protection and wrapped with thermoplastic.

ML-700 (Max load 700)

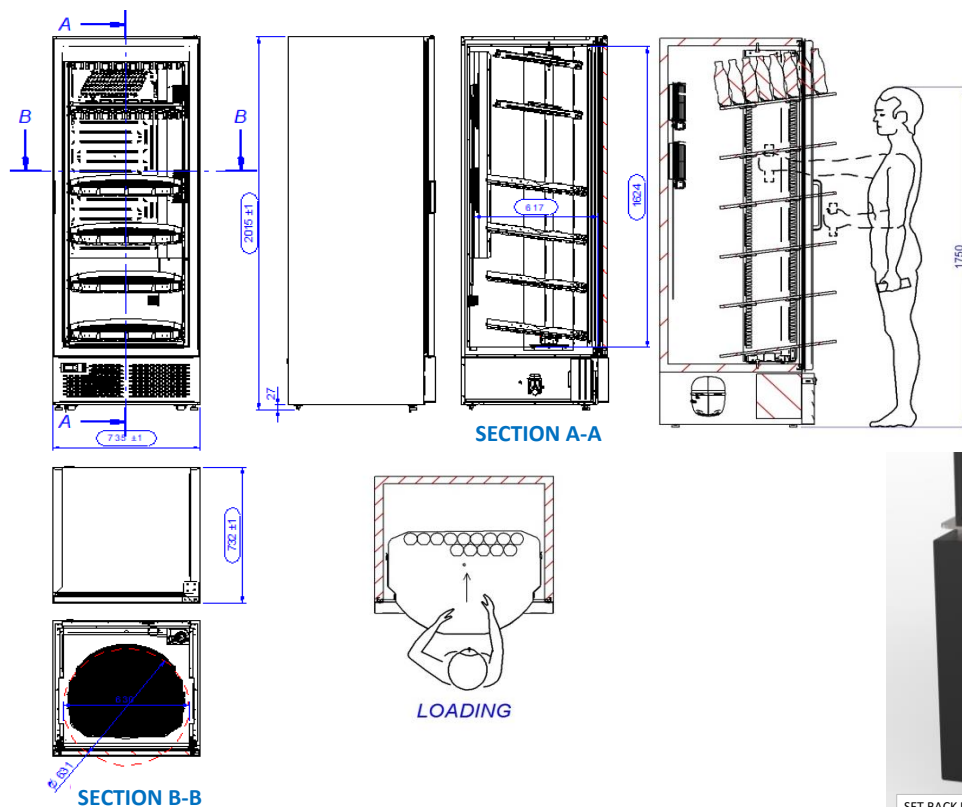

COMMON CONSTRUCTIVE DATA

High:	2015 mm	Exterior:	Sides, top and bottom painted in black RAL9005, other parts in galvanized.
Length:	735 mm	Interior:	Painted in white RAL9010.
Depth:	732 mm	Shelves:	Easyfill system with the following configuration:6U.
		Insulation:	Injected polyurethane 40 kg/m ³ (CFC free)
		Door:	Wiht doble glass tempered with air camera. Frame in mix (aluminum/plastic) and handle in black color.
		Lighting:	Led light in both sides (vertical position) and top (horizontal position).
		Temperature control:	Using digital thermostat.
		Bottom supports:	Four wheels and two adjustable front feet.

REFRIGERATION SYSTEM

Working temperature:	to +2 to +10 ° C with 25 ° C ambient and 60% relative humidity.
Compressor:	Hermetic compressor.
Evaporator:	Roll bond with air forced ventilation.
Condenser:	Wire on tube (low maintenance).
Refrigerating:	R-600a.

SPECIFICATIONS

Plate of numeration:	Option.
Packing:	Palet and cardboard box.
Delivery data:	packing in 1 pz.
Sticker:	Attention and danger.

4,1 kwh/24h